

EVS-2028 COLOR VIEWING STATION

The EVS-2028 boasts D5000 accuracy and consistency. Combined with sleek styling, it provides a viewing area of 20x28"/51x71cm and is perfect for a conference room, lobby, executive office or pressroom.



EVS-2028 desktop model

Versatile Work Station

This unit is perfect for the professional involved in inspecting transparencies, color prints and proofs, or for small press applications. It is the ideal solution for critical color evaluation and complies with industry D50 standard lighting and viewing conditions, ISO 3664:2009.

Lamp Monitoring System



LiteGuard II® is a critical quality control monitor, a backlit liquid crystal display of lamp hours used and lamp hours remaining on the daylight source. The LiteGuard II also indicates warm-up time and the hours remaining until recommended relamping.

Characteristics

- Elegant design
- Compliance with ISO 3664:2009, industry D50 standard
- Uniform illumination
- Graphicalite® 100 color viewing lamps
- Munsell N8/ grey surround
- High-efficiency reflectors
- Neutral diffusers that will not yellow
- Shipped disassembled to reduce costs
- Print bar allows positioning of an image vertically on the back wall for direct comparison to the press sheet on the horizontal viewing area

Graphicalite 100 Lamps



Every GTI® color viewing system features Graphicalite 100 color viewing lamps. To ensure optimum viewing conditions, these lamps are manufactured with a unique blend of fluorescent phosphors. Unequaled by any other 5000 Kelvin lamp in the industry, these Graphicalite 100 lamps produce a true full-spectrum white light which renders colors with the highest degree of accuracy and efficiency. In GTI viewers, the Graphicalite 100 lamp produces an actual system CRI approaching 95.



EVS-2028 with adjustable floorstand and sidewalls

ISO 3664:2009

This highly technical set of specifications enables lighting manufacturers to design, test and certify color viewing systems. The standard specifies a set of five conditions which must all be present in order to assure the benefits of the standard for the graphics and photographic industries. The EVS-2028 meets these five conditions:

- Color quality
- Light intensity
- Evenness
- Surround
- Geometry

Accessories







The EVS-2028 units are available with a variety of optional accessories: sidewalls that provide extra critical viewing conditions; adjustable floorstand; flat storage files for the storage of artwork, press sheets and color proofs; choice of table risers and adjustable floorstand which is shipped disassembled to reduce freight costs.









EVS-2028 with adjustable floorstand and riser

EVS-2028 ORDERING GUIDE

Choose one of the standard package options or create your own.

System Components H: 37" x W: 30" x D: 21.5"	Table Risers H: 8" x W: 30" x D: 21.5"	Floor Stand H: 32" x W: 30" x D: 21.5"
 Model EVS-2028	 Model SW-2028	 Model FS-2028 <i>Table riser optional Height is adjustable 32" - 48"</i>
	 Model TS-2028	
	 Model 1F-2028	
	 Model 2F-2028	

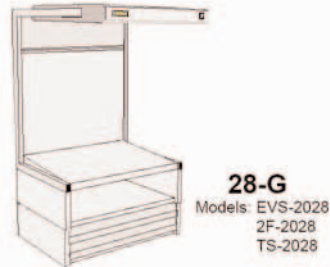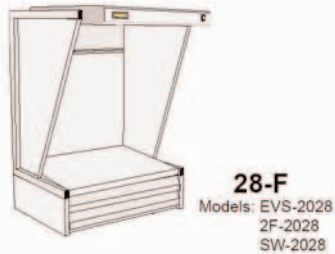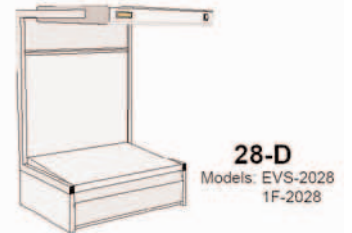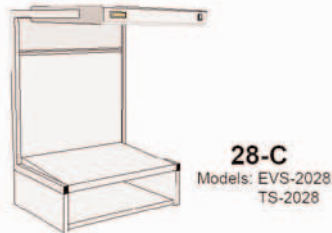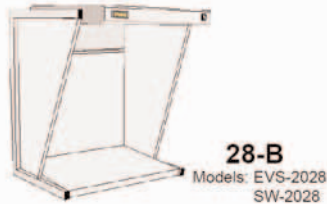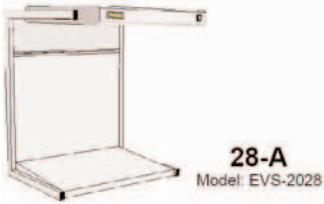

Brand and product names are trademarks of their respective holders. All trademarks may be registered in the U.S.A. and/or other countries. Product design and specifications subject to change without prior notice.

Los productos están protegidos por patentes y patentes pendientes en los EE.UU. y el extranjero, y son marcas registradas y propiedad de sus fabricantes. Las especificaciones y el diseño están sujetos a cambio sin previo aviso.