


RED LITHO TAPE

An optically transparent and photographically opaque tape used for prepress opaquing, stripping, edging and splicing applications

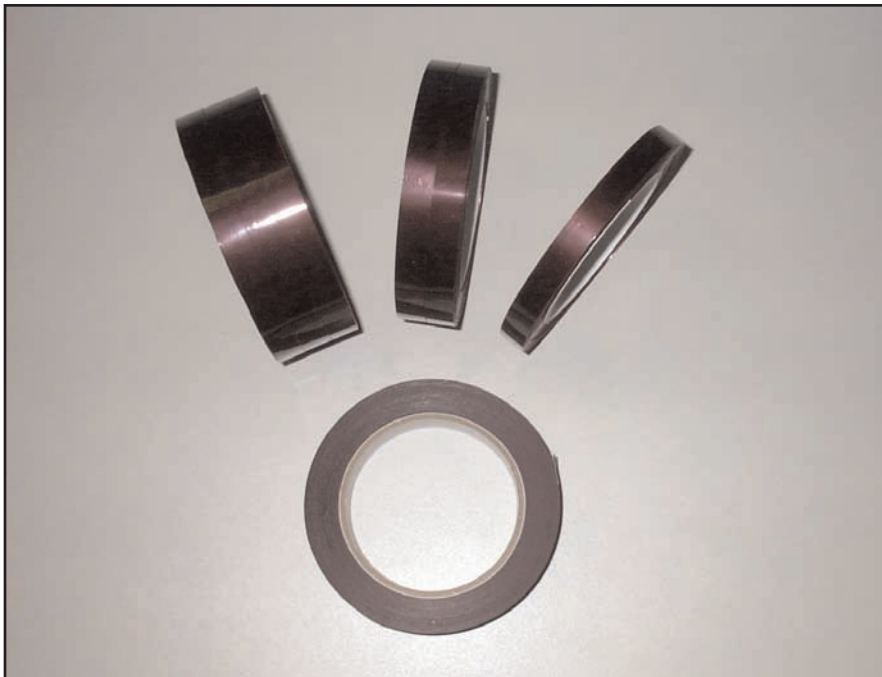

Standard Roll Length and Widths

Length 72 yards/66m

Widths .5"/12mm, .75"/19mm, 1"/25mm, 2"/50mm

Packaging (sold only in case lots)

.5" 72 rolls/case

.75" 48 rolls/case

1" 36 rolls/case

2" 36 rolls/case

- Transparent for accurate positioning purposes
- Easy to reposition
- Resistant to heat variations and therefore can be used in platemaking applications
- Provides sharp image definitions and resists ghosting because of its thin backing
- Minimizes opaquing because of its pinhole-free backing and ability to block out light
- Resists oozing during application and storage because its firm adhesive is resistant to softening

Color

Red

Backing

Non-plasticized polyvinylchloride

Adhesive

Solvent-based natural rubber

Total Tape Thickness

2.7 mil/.07mm

Storage

70°F/21°C; 50% relative humidity

Shelf Life

One year from date of manufacture

When service counts, count on Grafitec

Brand and product names are trademarks of their respective holders. All trademarks may be registered in the U.S.A. and/or other countries. Product design and specifications subject to change without prior notice.

Los productos están protegidos por patentes y patentes pendientes en los EE.UU. y el extranjero, y son marcas registradas y propiedad de sus fabricantes. Las especificaciones y el diseño están sujetos a cambio sin previo aviso.

Grafitec International Inc., 2684 N.W. 97 Avenue, Miami, FL 33172, Tel: 305/718-9941, Fax: 305/718-9362
E-mail: grafitec@grafitec.com, Internet: www.grafitec.com